

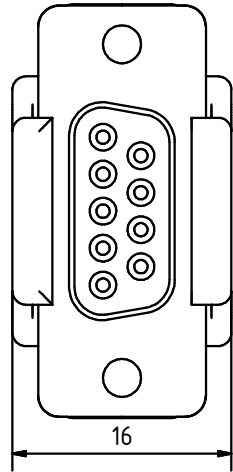
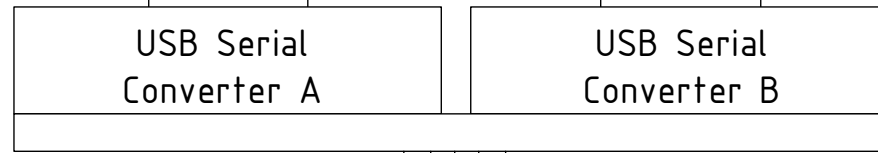
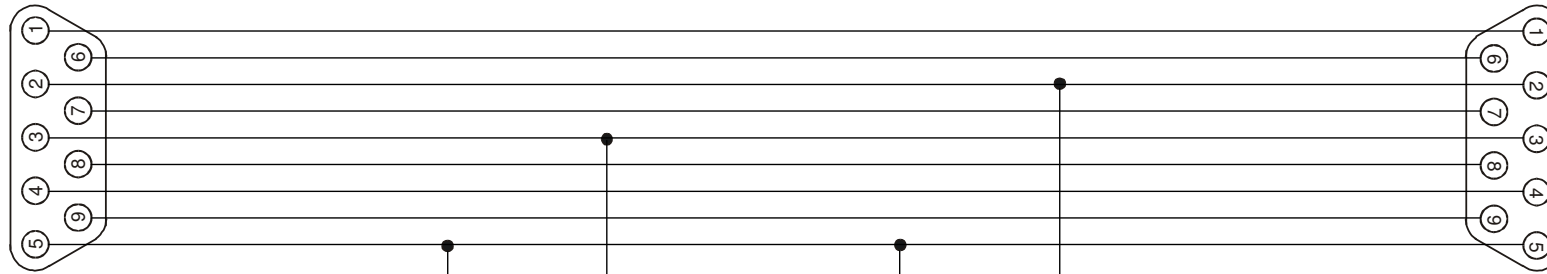



Device 1
Sub D9
female

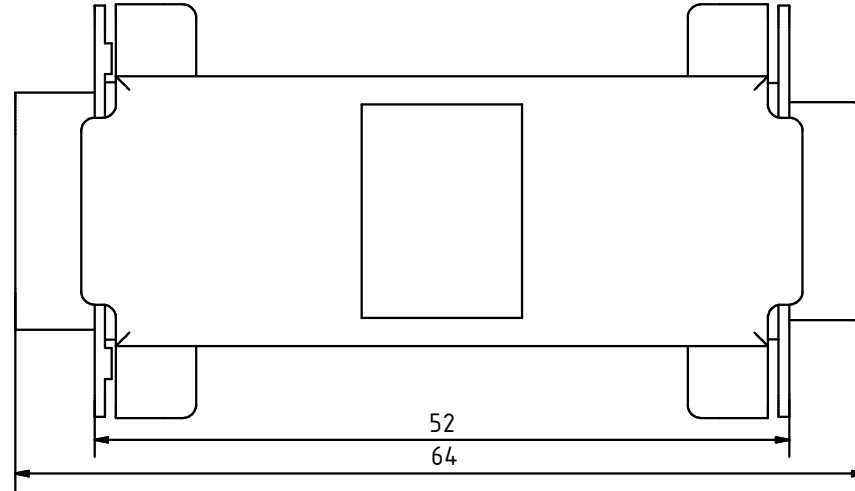


Device 2
Sub D9
male

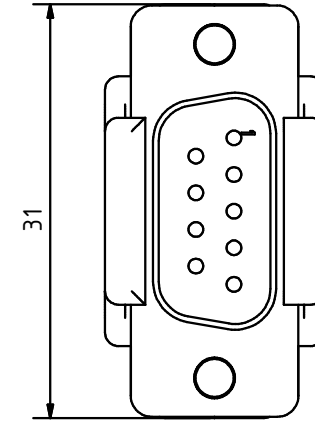

Monitoring Data Rate: 300 bps to 235 kbps
 Comm. Settings Support: 7 / 8 bit data, 1 / 2 stop bits, Odd/Even/Mark/Space/ No Parity
 Serial Converters: Dual Channel Serial Converter A/B
 Certifications: CE approval
 Standard Compliance: RoHS
 Power consumption: Typical 35mA at 5V = 165 mW
 Operating temperature: -40°C to 85°C

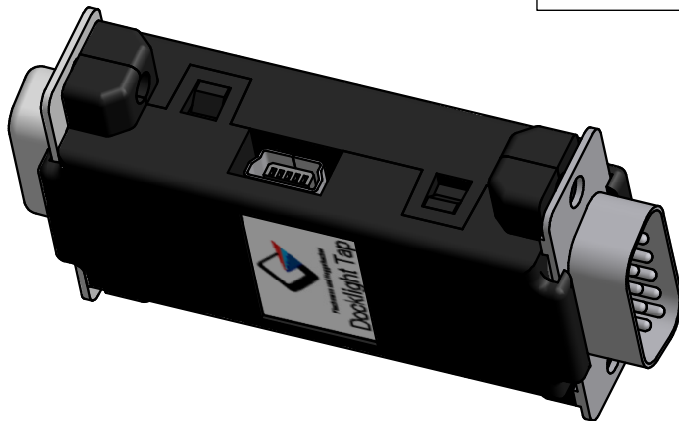

Mini USB



Toleranzen nach DIN ISO 2768-1c		Maßstab	Oberfläche:
Datum		Name	Material:
Bearb.	07.05.2009	MF	Docklight Tap with 1.8m "Mini-B" USB cable
Geprüft	08.05.2009	OH	
Norm			
01 First release 30.03.09 MF		# 300314147 1 / 1 Artikel-Nr.: A3	
Zust.	Änderungen		
Flachmann und Heggelbacher		www.fuh-edv.de	